

MEKI

PRODUCT
CATALOG




PROFESSIONAL IN SCREEN




ZIGNATURE SERIES

MANUAL WALL SCREEN



- Convenient hand pull adjuster
- Spring roller operated with auto stopping mechanism
- Durable in all environment condition
- Come with both wall and ceiling bracket
- Suitable for meeting rooms, schools and hotel function
- Easy to install

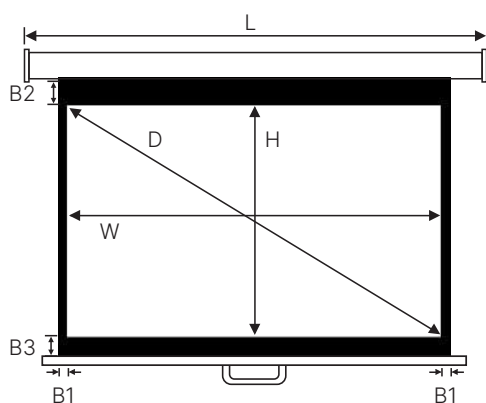

Casing Profile:



Installation Diagram:






Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)			Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H		B1	B2	B3	L	A	B
Z-MW-AV-60	1:1	85	1470	1470		25	25	25	1600	64	64
Z-MW-AV-70		99	1730	1730		25	25	25	1860	64	64
Z-MW-AV-80		113	1980	1980		25	25	25	2110	64	64
Z-MW-AV-84		119	2080	2080		25	25	25	2210	64	64
Z-MW-NTSC-84D	4:3	84	1660	1250		25	25	25	1790	64	64
Z-MW-NTSC-100D		100	1980	1490		25	25	25	2110	64	64
Z-MW-NTSC-120D		120	2390	1790		25	25	25	2520	64	64
Z-MW-NTSC-150D		150	2950	2240		50	50	50	3130	76	76
Z-MW-HD-80D	16:9	80	1720	945		25	25	25	1850	64	64
Z-MW-HD-92D		92	1990	1100		25	25	25	2120	64	64
Z-MW-HD-110D		110	2390	1320		25	25	25	2520	64	64
Z-MW-HD-138D		138	2950	1620		25	25	25	3080	64	64
Z-MW-HD-155D		155	3330	1830		50	50	50	3510	76	76





ZIGNATURE SERIES ELECTRIC SCREEN

- Fully assembled for easy installation
- Motorized movement control
- Wired and wireless remote control
- Quite and fluid like movement with just a switch away
- Screen's fall height adjustable

CONTROL SYSTEM

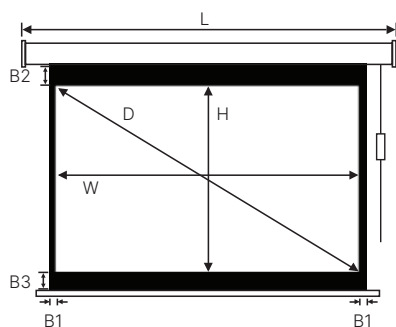

Installation Diagram:





Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
Z-MRS-AV-60	1:1	85	1470	1470	25	50	25	1730	89	89
Z-MRS-AV-70		99	1730	1730	25	50	25	1990	89	89
Z-MRS-AV-80		113	1980	1980	25	50	25	2240	89	89
Z-MRS-AV-84		119	2080	2080	25	50	25	2340	89	89
Z-MRS-AV-96		136	2390	2390	25	50	25	2650	89	89
Z-MRS-AV-120		170	2990	2990	30	80	30	3260	89	89
Z-MRS-AV-144		204	3600	3600	30	80	30	3870	89	89
Z-MRS-NTSC-84D	4:3	84	1660	1250	25	50	25	1920	89	89
Z-MRS-NTSC-100D		100	1980	1490	25	50	25	2240	89	89
Z-MRS-NTSC-120D		120	2380	1790	30	80	30	2650	89	89
Z-MRS-NTSC-150D		150	2990	2240	30	80	30	3260	98	98
Z-MRS-NTSC-180D		180	3600	2580	40	40	40	3890	120	120
Z-MRS-NTSC-200D		200	3980	2990	40	40	40	4270	160	160
Z-MRS-HD-92D	16:9	92	1980	1110	25	80	25	2240	89	89
Z-MRS-HD-100D		110	2380	1330	30	80	30	2650	89	89
Z-MRS-HD-120D		138	2990	1675	30	100	30	3260	89	89
Z-MRS-HD-150D		155	3370	1890	30	100	30	3640	98	98




ZIGNATURE SERIES

TRIPOD SCREEN

- Lightweight and portable
- Easy assembly
- Adjustable height
- Rust proof metal coating
- Strong and sturdy built for all purpose use
- Suitable for school, office and even outdoor sales

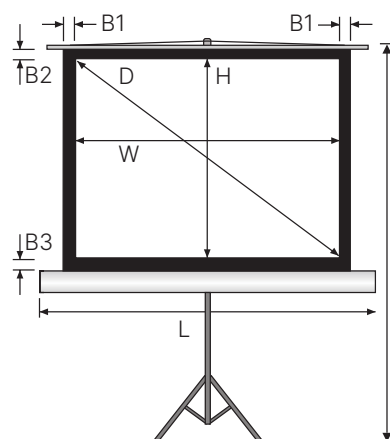

Casing Profile:



Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
Z-TR-AV-60	1:1	85	1470	1470	25	25	25	1600	64	64
Z-TR-AV-70		99	1730	1730	25	25	25	1860		
Z-TR-AV-80		113	1980	1980	25	25	25	2110		
Z-TR-AV-84		119	2080	2080	25	25	25	2210		
Z-TR-AV-96		136	2380	2380	30	80	30	2520		
Z-TR-NTSC-84D	4:3	84	1660	1250	25	25	25	1790	64	64
Z-TR-NTSC-100D		100	1980	1490				2110		
Z-TR-NTSC-120D		120	2390	1790				2520		
Z-TR-HD-80D	16:9	80	1720	945	25	25	25	1850	64	64
Z-TR-HD-92D		92	1990	1100				2120		
Z-TR-HD-110D		110	2390	1320				2520		





SIGNATURE SERIES

TAB TENSIONED SCREEN

- An upgrade version of electric screen
- With tubular motor and remote control
- Unique cable borders to ensure flat surface
- Both wall and ceiling mount available
- Wired and wireless remote access
- Perfect for board and conference room

CONTROL SYSTEM

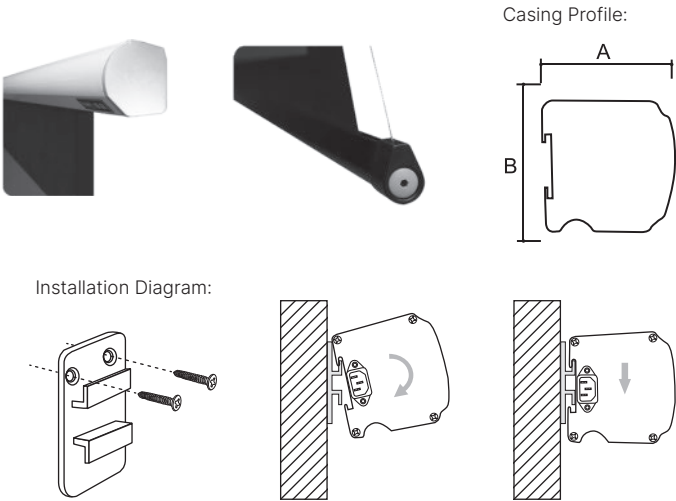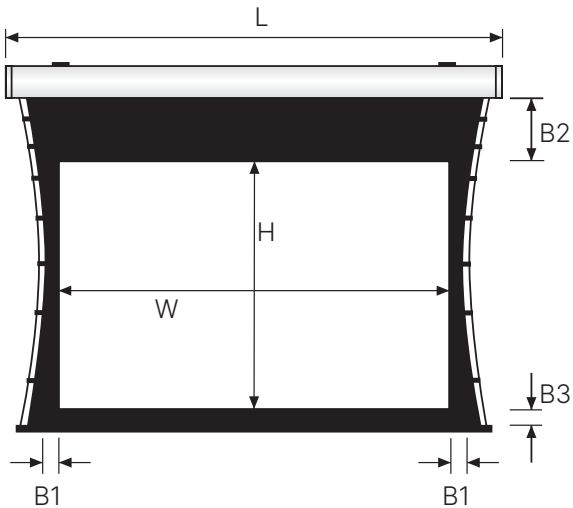

Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
Z-TTM-NTSC-72D	4:3	72	1370	1110	50	200	30	1800	90	90
Z-TTM-NTSC-84D		84	1650	1240				2080		
Z-TTM-NTSC-100D		100	1970	1480				2400		
Z-TTM-NTSC-120D		120	2380	1790				2810		
Z-TTM-NTSC-150D		150	2990	2240				3420		




ZIGNATURE SERIES


BUILT IN-CEILING SCREEN

Integrating a ceiling recessed projection screen was never this easy. Meki In-Ceiling Screen is designed to be hidden in ceiling, the screen can be easily concealed and the installation is simple and quick. The solid shell board combines both practicality and beauty. Meki ICS has standard black edges surrounding the screen, which effectively absorbs the misaligned lights from the projector. It makes the edges of projected images sharp and clean. Furthermore Meki ICS are applicable to any types of ceilings.

CONTROL SYSTEM

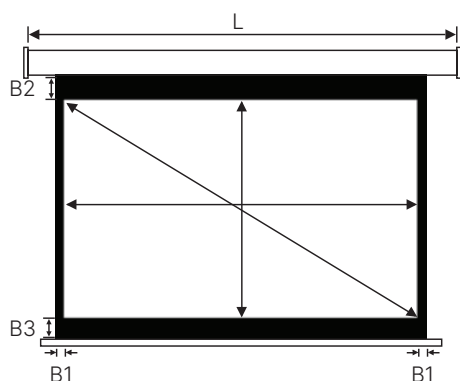

Installation Diagram

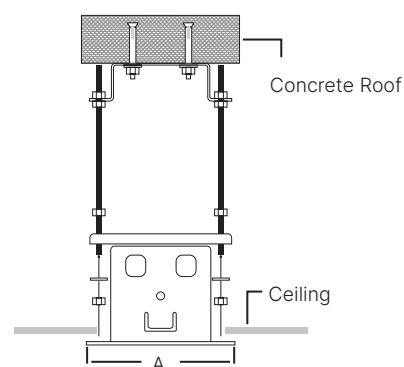


Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
CBS-NTSC-84D	4:3	84	1660	1250	25	50	25	1920	150	90
CBS-NTSC-100D		100	1980	1490	25	50	25	2240		
CBS-NTSC-120D		120	2390	1790	30	80	30	2650		
CBS-NTSC-150D		150	2950	2240	30	80	30	3260		
CBS-NTSC-200D		200	3960	3050	40	40	40	4350		
CBS-HD-80D	16:9	80	1720	970	25	80	25	1990	150	90
CBS-HD-92D		92	1990	1110	25	80	25	2240		
CBS-HD-110D		110	2390	1330	30	80	30	2650		
CBS-HD-138D		138	2950	1675	30	100	30	3260		
CBS-HD-155D		155	3330	1890	30	100	30	3640		




VISTA SERIES MANUAL WALL SCREEN



- Convenient hand pull adjuster
- Spring roller operated with auto stopping mechanism
- Durable in all environment condition
- Come with both wall and ceiling bracket
- Suitable for meeting rooms, schools and hotel function
- Easy to install

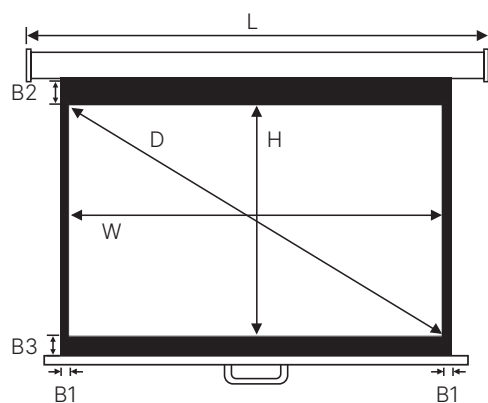

Casing Profile:



Installation Diagram:





Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
MW-AV-60	1:1	85	1470	1470	25	25	25	1600	64	64
MW-AV-70		99	1730	1730	25	25	25	1860	64	64
MW-AV-84		119	2080	2080	25	25	25	2210	64	64
MW-AV-96		136	2440	2440	30	50	30	2630	100	100
MW-NTSC-84D	4:3	84	1660	1250	25	25	25	1790	64	64
MW-NTSC-100D		100	1980	1490	25	25	25	2110	64	64
MW-NTSC-120D		120	2390	1790	25	25	25	2520	64	64
MW-NTSC-150D		150	2950	2240	50	50	50	3130	76	76
MW-HD-80D	16:9	80	1720	945	25	25	25	1850	64	64
MW-HD-92D		92	1990	1100	25	25	25	2120	64	64
MW-HD-110D		110	2390	1320	25	25	25	2520	64	64
MW-HD-138D		138	2950	1620	25	25	25	3080	64	64
MW-HD-155D		155	3330	1830	50	50	50	3510	76	76





VISTA SERIES ELECTRIC SCREEN

- Fully assembled for easy installation
- Motorized movement control
- Wired and wireless remote control
- Quite and fluid like movement with just a switch away
- Screen's fall height adjustable

CONTROL SYSTEM

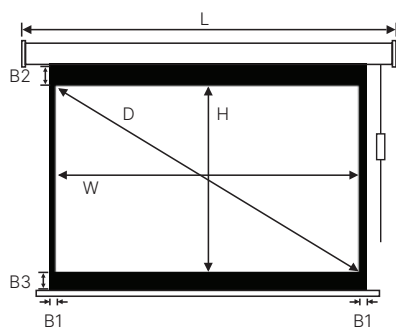

Installation Diagram:





Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
MRS-AV-60	1:1	85	1470	1470	25	50	25	1730	89	89
MRS-AV-70		99	1730	1730	25	50	25	1990	89	89
MRS-AV-80		113	1980	1980	25	50	25	2240	89	89
MRS-AV-84		119	2080	2080	25	50	25	2340	89	89
MRS-AV-96		136	2390	2390	25	50	25	2650	89	89
MRS-AV-120		170	2990	2990	30	80	30	3260	89	89
MRS-AV-144		204	3600	3600	30	80	30	3870	89	89
MRS-NTSC-84D	4:3	84	1660	1250	25	50	25	1920	89	89
MRS-NTSC-100D		100	1980	1490	25	50	25	2240	89	89
MRS-NTSC-120D		120	2380	1790	30	80	30	2650	89	89
MRS-NTSC-150D		150	2990	2240	30	80	30	3260	98	98
MRS-NTSC-180D		180	3600	2580	40	40	40	3890	120	120
MRS-NTSC-200D		200	3980	2990	40	40	40	4270	160	160
MRS-HD-92D	16:9	92	1980	1110	25	80	25	2240	89	89
MRS-HD-100D		100	2380	1330	30	80	30	2650	89	89
MRS-HD-120D		120	2990	1675	30	100	30	3260	89	89
MRS-HD-150D		150	3370	1890	30	100	30	3640	98	98




VISTA SERIES TRIPOD SCREEN

- Lightweight and portable
- Easy assembly
- Adjustable height
- Rust proof metal coating
- Strong and sturdy built for all purpose use
- Suitable for school, office and even outdoor sales

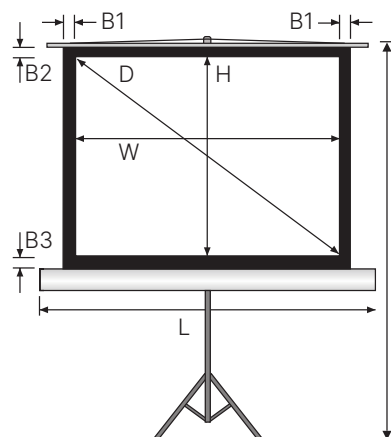

Casing Profile:




Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)			Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H		B1	B2	B3	L	A	B
TR-AV-60	1:1	85	1470	1470		25	25	25	1600	64	64
TR-AV-70		99	1730	1730		25	25	25	1860		
TR-AV-80		113	1980	1980		25	25	25	2110		
TR-AV-84		119	2080	2080		25	25	25	2210		
TR-AV-96		136	2380	2380		30	80	30	2520		
TR-NTSC-84D	4:3	84	1660	1250					1790	64	64
TR-NTSC-100D		100	1980	1490	25	25	25		2110		
TR-NTSC-120D		120	2390	1790					2520		
TR-HD-80D	16:9	80	1720	945					1850	64	64
TR-HD-92D		92	1990	1100	25	25	25		2120		
TR-HD-110D		110	2390	1320					2520		




VISTA SERIES TAB TENSIONED SCREEN

- An upgrade version of electric screen
- With tubular motor and remote control
- Unique cable borders to ensure flat surface
- Both wall and ceiling mount available
- Wired and wireless remote access
- Perfect for board and conference room




CONTROL SYSTEM

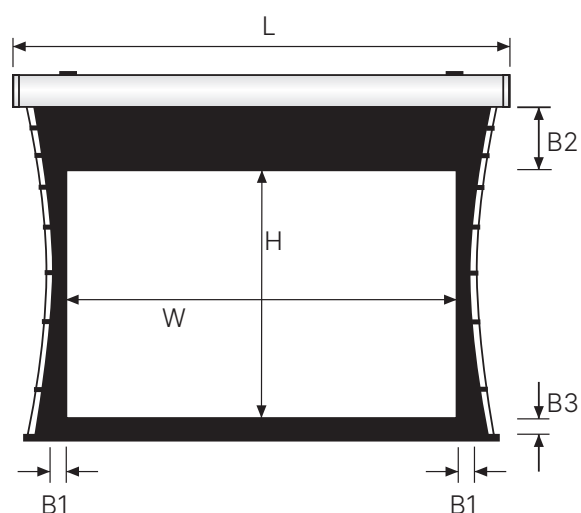

Casing Profile:



Installation Diagram:



Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
TTM-NTSC-72D	4:3	72	1370	1110	50	200	30	1800	90	90
TTM-NTSC-84D		84	1650	1240				2080		
TTM-NTSC-100D		100	1970	1480				2400		
TTM-NTSC-120D		120	2380	1790				2810		
TTM-NTSC-150D		150	2990	2240				3420		




VISTA SERIES BUILT IN-CEILING SCREEN


Integrating a ceiling recessed projection screen was never this easy. Meki In-Ceiling Screen is designed to be hidden in ceiling, the screen can be easily concealed and the installation is simple and quick. The solid shell board combines both practicality and beauty. Meki ICS has standard black edges surrounding the screen, which effectively absorbs the misaligned lights from the projector. It makes the edges of projected images sharp and clean. Furthermore Meki ICS are applicable to any types of ceilings.




CONTROL SYSTEM

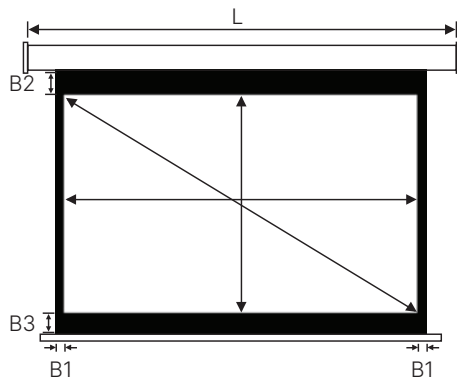

Installation Diagram


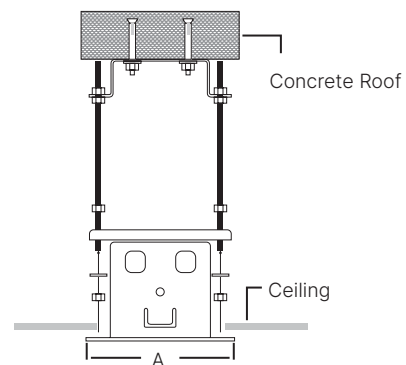


Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
CBS-NTSC-84D	4:3	84	1660	1250	25	50	25	1920	150	90
CBS-NTSC-100D		100	1980	1490	25	50	25	2240		
CBS-NTSC-120D		120	2390	1790	30	80	30	2650		
CBS-NTSC-150D		150	2950	2240	30	80	30	3260		
CBS-NTSC-200D		200	3960	3050	40	40	40	4350		
CBS-HD-80D	16:9	80	1720	970	25	80	25	1990	150	90
CBS-HD-92D		92	1990	1110	25	80	25	2240		
CBS-HD-110D		110	2390	1330	30	80	30	2650		
CBS-HD-138D		138	2950	1675	30	100	30	3260		
CBS-HD-155D		155	3330	1890	30	100	30	3640		

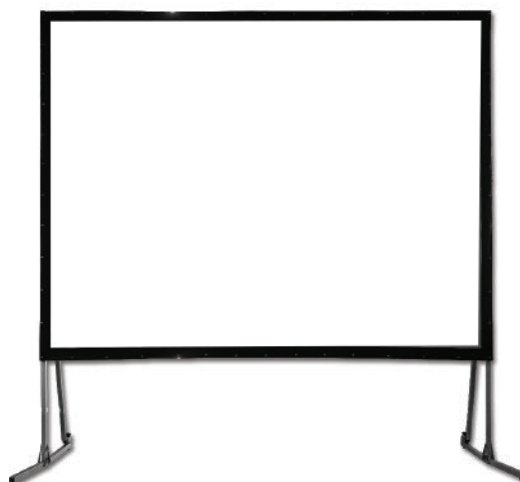


VISTA SERIES FAST FOLD SCREEN

- Optional front and rear projection
- Available up to 300" diagonal
- Foldable aluminium case
- Comes portable in hard plastic case with wheels
- Suitable for large or out door events
- Optional accessories: skirting or side laces
- Business Office & Education Projection Screen

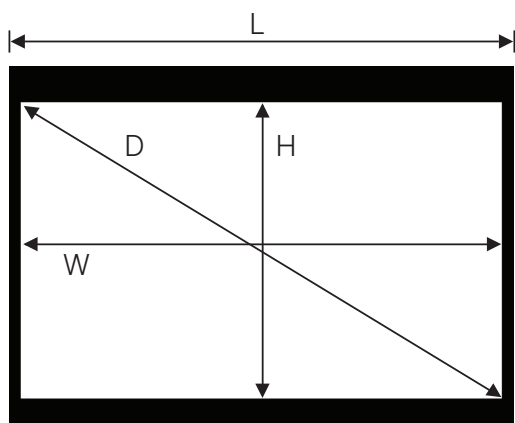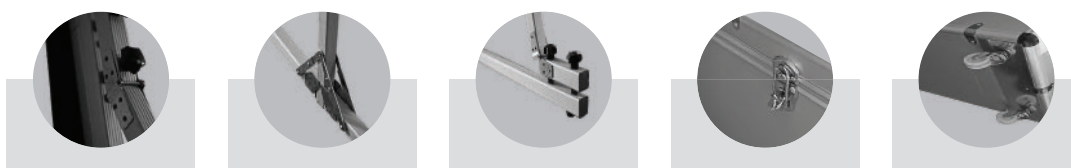

Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)			Four Black Border (mm)	Frame Width (mm)	Casing Size L x A x B (mm)		
		D	W	H				L	A	B
LF-72V	4:3	72	1460	1100	50	36	1560	1200	97	
LF-84V		84	1730	1220			1830	1320		
LF-100V		100	2030	1520			2130	1620		
LF-120V		120	2440	1830			2612	1930		
LF-150V		150	3050	2290			3222	2390		
LF-180V		180	3660	2740			3832	2840		
LF-200V		200	4060	3050			4232	3150		
LF-300V		300	6100	4570			6272	4670		

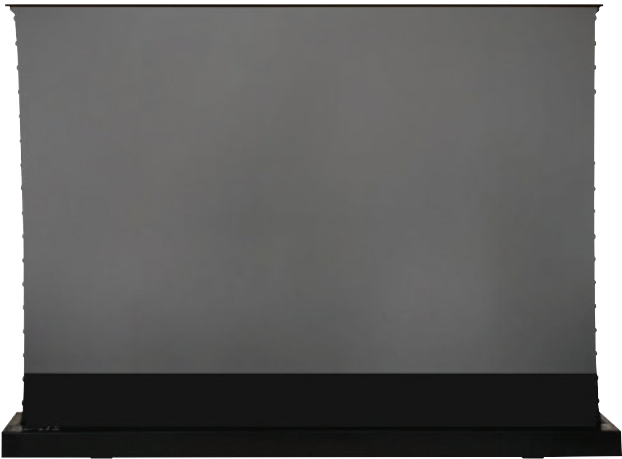

VISTA SERIES

S PRO MOTORISED


FLOOR STAND SCREEN

- Sturdy and durable aluminum casing.
- Plug and play design.
- Tab tension design to ensure flat viewing surface with a variety of materials available.
- Opened with remote control.
- Double support rod structure to ensure maximum stability.
- Multiple application scenarios such as, home theatre, business meetings, exhibition booths, etc.
- ALR material available for Zignature series.

PRODUCT DETAILS



Aluminum casing with tension wire design

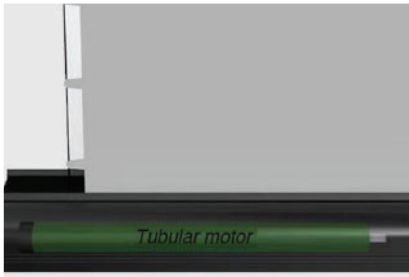

Auto power off to protect motor from overheating




Screen opened with remote control




Strong scissors support structure

Model	Size	Viewing Size (mm)	Casing Length (mm)	Screen Height	Bottom Height	Casing Width	Casing Height	Carton Size	NW (KG)
EFS-HD-92	92"	2030 x 1150	2320	1610	400	25	1920	2470 x 280 x 180	25
EFS-HD-100	100"	2210 x 1240	2490	1700	400	25	2240	2640 x 280 x 180	30
EFS-HD-106	106"	2340 x 1320	2630	1780	400	30	2650	2780 x 280 x 180	34
EFS-HD-120	120"	2650 x 1490	2930	1950	400	30	3260	3080 x 280 x 180	41
EFS-HD-135	135"	2980 x 1670	3280	2130	400	40	4350	3420 x 280 x 180	51
EFS-HD-150	150"	3320 x 1860	3610	2320	400	25	1990	3750 x 280 x 180	56


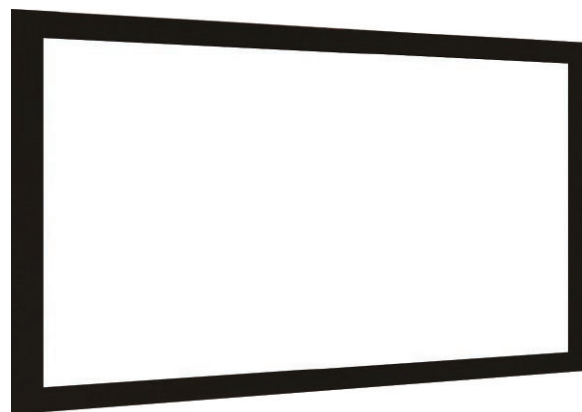


VISTA SERIES CLASSIC FIXED FRAME


- Elegant and durable
- Simple installation system
- Perfect picture quality with flat surface
- In-house cinema experience
- Change of velvet color is available upon request
- Sleek frame design blends in well with modern interior concepts
- Special and custom sizes are available upon request and other fabric materials

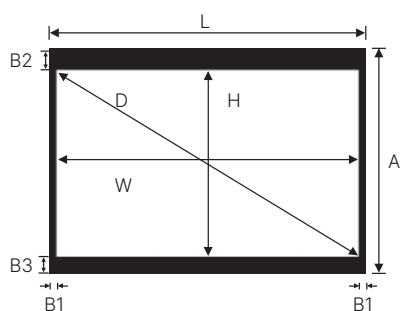

Installation Diagram:

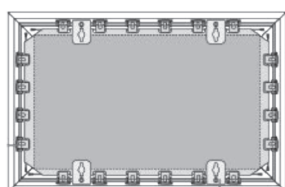


Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Frame Width (mm)	Casing Size L x A x B (mm)		
		D	W	H		L	A	B
FXB-3072	4:3	72	1460	1100	60	1790	1220	60
FXB-3084		84	1700	1280	60	2030	1400	60
FXB-3100		100	2030	1520	60	2360	2360	60
FXB-3120		120	2440	1830	80	2810	2810	80
FXB-3135		135	3050	2290	80	3420	3420	80
FXB-3150		150	3050	2290	80	3420	3420	80
FXB-3180		180	3660	2740	80	4030	4030	80
FXB-3200		200	3940	2930	80	4310	4310	80
FXB-9072	16:9	72	1590	900	60	1920	1920	60
FXB-9084		84	1870	1050	60	2200	2200	60
FXB-9092		92	2040	1150	60	2370	2370	60
FXB-9100		100	2210	1250	60	2540	2540	60
FXB-9106		106	2350	1320	60	2680	2680	60
FXB-9120		120	2660	1490	80	3030	3030	80
FXB-9135		135	2990	1680	80	3360	3360	80
FXB-9150		150	3320	1870	80	3690	3690	80
FXB-9159		159	3520	1980	80	3890	3890	80
FXB-9165		165	3650	2050	80	4020	4020	80
FXB-9180		180	3980	2240	80	4350	4350	80
FXB-9200		200	4420	2500	80	4790	4790	80
FXB-2085	2.35:1	85	1990	850	60	2320	2320	60
FXB-2096		96	2240	960	60	2570	2570	60
FXB-2103		103	2410	1020	60	2740	2740	60
FXB-2115		115	2690	1150	80	3060	3060	80
FXB-2125		125	2920	1250	80	3290	3290	80
FXB-2133		133	3110	1320	80	3480	3480	80
FXB-2138		138	3230	1370	80	3600	3600	80


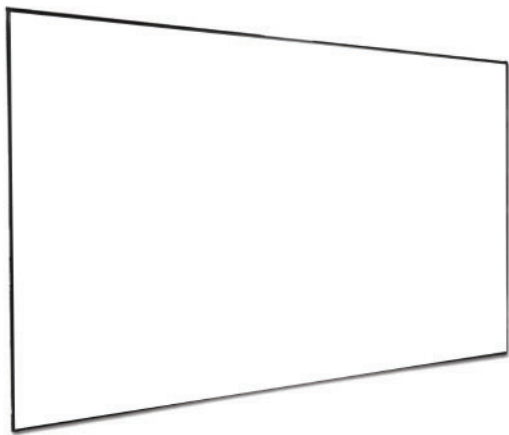


VISTA SERIES ULTRA SLIM FIXED FRAME SCREEN


Experience the feeling of borderless design with the Meki SFF. It has a super narrow bezel which looks like a huge TV, the frame is made of aluminium alloy and just 1 centimetre width. It supports active3D and 4K ultra high resolution, improving the content visibility to the audience. The unobstructive display also features narrow bezels, which provides a broad viewing area on a near-seamless digital canvas.

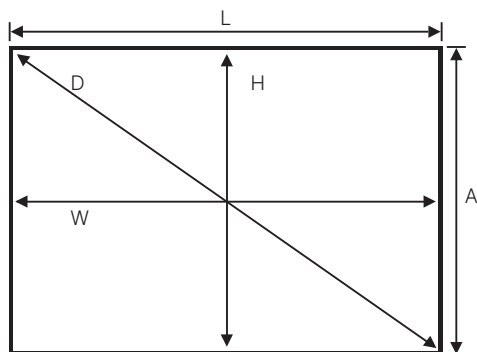

Installation Diagram:

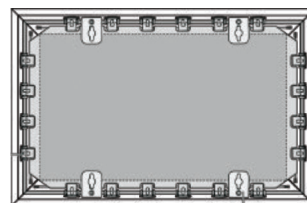

Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)			Casing Size L x A x B (mm)		
		D	W	H	B	L	A	B
SFF84V	4:3	84	1710	1280	10	1730	1730	35
SFF100V		100	2030	1520		2050	1540	
SFF120V		120	2440	1830		2460	1850	
SFF150V		150	3050	2290		3070	2310	
SFF180V		180	3660	2740		3680	2760	
SFF200V		200	4060	3050		4080	3070	
SFF80H	16:9	80	1780	1000	10	1800	1020	35
SFF92H		92	2030	1140		2050	1160	
SFF110H		110	2440	1360		2460	1380	
SFF120H		120	2660	1490		2680	1510	
SFF133H		133	2940	1660		2960	1680	
SFF150H		150	3320	1870		3340	1890	
SFF180H		180	3950	2240		4000	2260	
SFF200H		200	4430	2490		4450	2510	

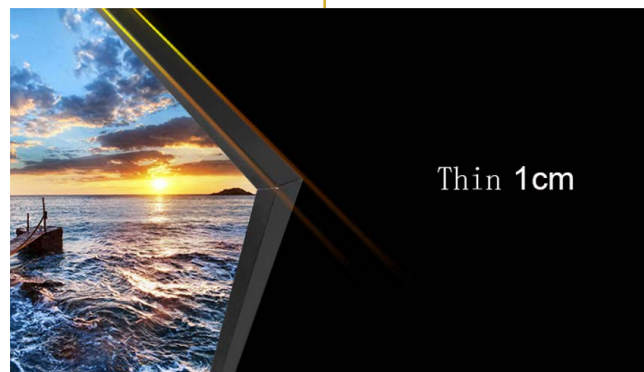


ZIGNATURE SERIES


ALR FIXED FRAME SCREEN

- High-contrast screens reflect and direct all projected light towards viewers while absorbing ambient light, creating bright, color-rich images with clear detail.
- Provides a sleek and professional appearance, complementing any home theater or presentation space, while keeping the screen taut for optimal viewing.
- Features a compact, space-saving installation design.
- Supports screen sizes up to 120" diagonal (16:9 format).
- Compatible with all Ultra Short Throw (UST) Projectors.
- Offers a super large flat screen and wide-angle display for immersive viewing.

PRODUCT IMAGES

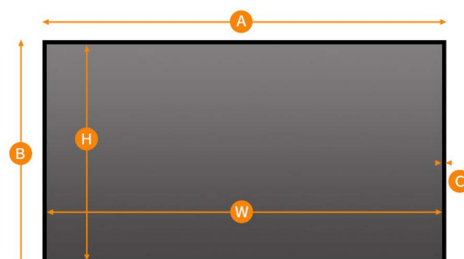

PRODUCT DETAILS

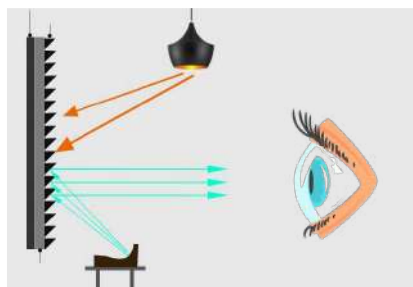

Ambient light rejecting material




Accurate colors with uniform brightness

ALP Screens	Material	Gain	Viewing Angle	Frame Size H x W (mm)	Frame Diagonal	Viewing Surface H x W (mm)	Viewing Surface Diagonal	Format
ZIGnature ALP FIXED FRAME	TAIWAN	0.35	140°	1270 x 2240	101.5"	1245 x 2215	100"	HD 16:9
ZIGnature ALP FIXED FRAME	TAIWAN	0.35	140°	1520 x 2685	121.5"	1495 x 2660	120"	HD 16:9


VISTA SERIES

ELECTRIC FIXED FRAME SCREEN


Meki EFF Series is a high end fixed position screen with metal composite frame. It comes with two layers of screen; the rear layer is used for 2D projection, while the front layer is for 3D projection. The electric frame cleverly merges the two layers together, when not in use, the front screen is able to display a beautiful landscape image which looks like a painted drawing. The Electric Fixed Frame Screen provides a variety of wood surface frames. It is equipped with a high-grade, fashionable RF remote control.

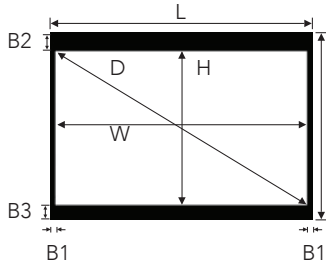

Frame Profile:



Operating Diagram:



Installation Diagram:



CONTROL SYSTEM



Velvet Sticker Surface



Wall switch & Remote
RC01

OPTIONAL FRAME COLOR



Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)			Frame Width (mm)			Product Size L x A x B (mm)		
		D	W	H	B	L	A	B			
EFXB-9100	4:3	100	2030	1520	160	2350	1840	125			
EFXB-9120		120	2440	1830		2760	2150				
EFXB-9150		150	3050	2290		3370	2610				
EFXB-9180		180	3660	2740		3980	3060				
EFXB-9200		200	4060	3050		4380	3370				
EFXB-9100HB	16:9	100	2210	1240	160	2530	1560	125			
EFXB-9106HB		106	2340	1320		2660	1640				
EFXB-9120HB		120	2650	1490		2970	1810				
EFXB-9150HB		150	3320	1870		3640	2190				
EFXB-9180HB		180	3980	2240		4300	2560				
EFXB-9200HB		200	4420	2500		4740	2820				



STEP1
(Closed)



STEP2
(Open Half)



STEP3
(Full Open)

Suggest Materials Match:


Option A:
Front Material-one Picture
Back Material-PVC White/Black

Option B:
Front Material-PVC Grey/Black
Back Material-3D silver Film

VISTA SERIES

CURVED FIXED FRAME SCREEN

Meki Curved Fixed Frame Screen is designed to reflect ultra wide projection images, ideally to project life sized objects or sceneries with two projectors or even more. The screen is wrapped with steel branches, borders are adjustable with sliding slot, which makes the screen level to be freely adjustable. It is easy to find the ideal position with the sliding type of mountings. Furthermore CFF series are easy to assemble thus the installation process is fast.

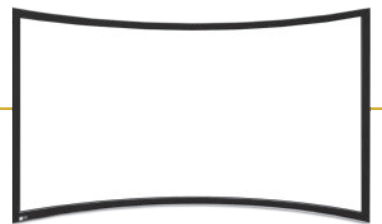

Standing:



Installation Methods:
Hanging:



Optionals Stands:



Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)			Four Black Border (mm)	Tube Diameter (mm)	Product Size (mm)		
		D	W	H	B			Weight	Height	Deep
LCF-6072	4:3	72	1460	1100	50	100	225	1760	1200	
LCF-6084		84	1710	1280				2010	1380	
LCF-6100		100	2030	1520				2330	1620	
LCF-6120		120	2440	1830				2740	1930	
LCF-6135		135	2740	2060				3040	2160	
LCF-6150		150	3050	2290				3350	2390	
LCF-6180		180	3660	2740				3960	2840	
LCF-6200		200	3940	2930				4240	3030	
LCF-9100HD	16:9	100	2210	1250	50	100	225	2510	1350	
LCF-9120HD		120	2660	1490				2960	1590	
LCF-9150HD		150	3320	1870				3620	1970	
LCF-9180HD		180	3980	2240				4280	2340	
LCF-9200HD		200	4420	2940				4720	3040	




VISTA SERIES TITAN ENGINEERING SCREEN



Meki Titan Engineering Screen is the best solution for theaters and other large-scale demonstrations sites. It is designed for both indoor or outdoor stages. Meki TES uses Pro-Matte white screen fabric, and the maximum width is up to 12 metres. It is equipped with a heavy duty bottom bar which stabilizes and keeps the screen to remain flat at all times, without deformation. Comes with built-in high quality silent tubular motor and built-in receiver.



CONTROL SYSTEM

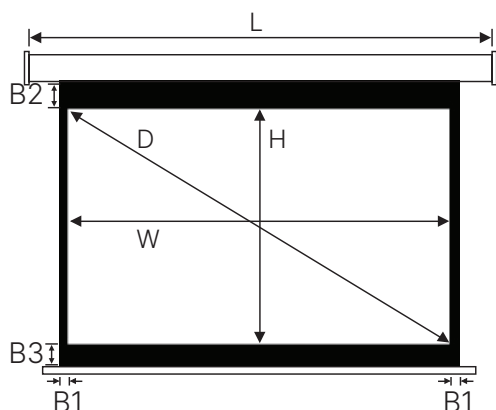

Installation diagram

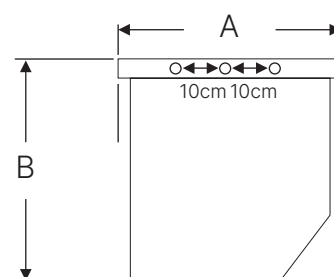

Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
TES-NTSC-250D	4:3	250	4980	3740	50	50	50	5610	400	420
TES-NTSC-300D		300	6000	4500	50	50	50	6630	400	420
TES-NTSC-400D		400	8010	6010	60	60	60	8660	450	500
TES-NTSC-500D		500	10020	7520	70	70	70	10690	450	500
TES-NTSC-600D		600	12040	9030	80	80	80	12730	450	500
TES-NTSC-250D	16:9	250	5400	3050	50	50	50	6070	400	420
TES-NTSC-300D		300	6530	3670	60	60	60	7180	400	420
TES-NTSC-400D		400	8920	4900	70	70	70	9390	450	500
TES-NTSC-400D		500	10920	6130	80	80	80	11610	450	500



VISTA SERIES
TWICE LIFTING SCREEN

- Suitable for wide space and tall ceiling environments.
- Motorised wired screen which drops the screen from a high ceiling.
- Able to drop and unfold the screen from up to 5m height.
- Built-in safe and reliable anti-fall system.
- Equipped with a high-grade, dual-band wireless remote control.

PRODUCT DETAILS



Strong metal parts and wire to ensure safety and reliability




Drops and unfold screen up to 5m




Durable and high-grade casing

Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)			Left & Right Black Border (mm)		Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1		B2	B3		L	A	B
TL100VM	4:3	100	1910	1430	25		25	25	25	2490	400	420
TL120VM		120	2300	1730	25		25	25	25	2880		
TL150VM		150	2890	2170	50		50	50	50	3520		
TL200VM		200	3960	2970	50		50	50	50	4590		
TL92HM	16:9	92	1910	1070	25		25	25	25	2490	400	420
TL106HM		106	2300	1290	25		25	25	25	2880		
TL138HM		138	2890	1620	25		25	25	25	3470		
TL200HM		200	4330	2430	50		50	50	50	4960		
TL250HM		250	5440	3050	50		50	50	50	6070		

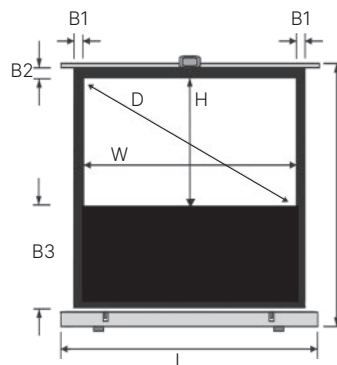


VISTA SERIES FLOOR STAND SCREEN

- Lightweight and easy installation system
- Available from 60" to 80" diagonal
- Durable hard metal casing
- Scissors joints that makes it strong and sturdy
- Portable and easy storage design



Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Left & Right Black Border (mm)	Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B1	B2	B3	L	A	B
FS-POST-60D	4:3	60	1220	920	40	40	1050	1350	120	110
FS-POST-72D		72	1460	1090			740	1600		
FS-POST-80D		80	1625	1220			710	1760		
FS-POST-100D		100	2030	1520			680	2170		

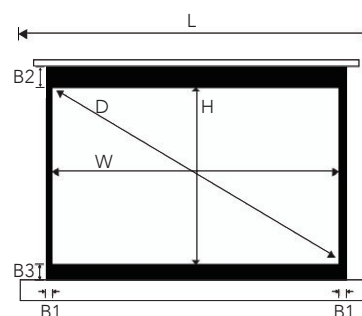

VISTA SERIES TABLE TOP SCREEN



- Lightweight and easy installation system
- Strong and durable foot stand
- Build with handle
- Available from 20" to 50" diagonal
- Suitable for travelling and small group presentation

Model	Ratio	Diagonal (inch)	Viewing Size W x H (mm)		Top Black Border (mm)	Bottom Black Border (mm)	Casing Size L x A x B (mm)		
		D	W	H	B2	B3	L	A	B
LTS-20V	4:3	20	410	300	25	25	510	410	70
LTS-30V		30	610	460			710	570	
LTS-40V		40	810	610			910	720	
LTS-50V		50	1020	760			1120	870	



FIT SCREEN

- Tripod + Wall Screen (Multipurpose screen)
- The FIT Screen is a lightweight, portable projection screen that may be used as a free-standing tripod or as a hanging wall display. It's designed to be used for ultra-portable presentations.
- The screen is made up of an upright structure, a tripod, and removable projection material that is held in place by counterweights at the top and bottom.

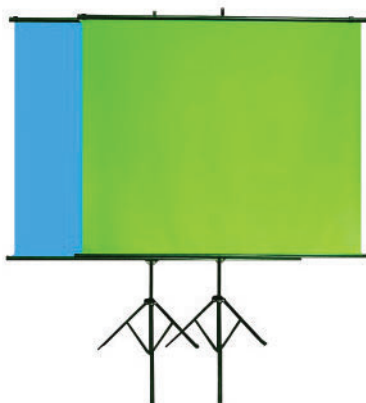

COLOR OPTION

GREEN :

Green Screen as RGB Color Value : 0, 177, 64

Green Screen as CMYK Color Value : 81, 0, 92, 0

Green Screen as Hex Color Value : #00b140

Green Screen as Websafe Color Value : #009933

BLUE :

Blue Screen as RGB Color Value : 0, 71, 64

Blue Screen as CMYK Color Value : 90, 68, 0, 0

Blue Screen as Hex Color Value : #0047bb

Blue Screen as Websafe Color Value : #0033cc

VISTA SERIES FIT CHROMA KEY SCREEN


Green Screen, Blue Screen or chroma key compositing is a powerful and flexible video production tool that allows you to incorporate any location for a fraction of the price.

- Wrinkle-resistant heavy-duty fabric
- Matte fabric ensures no reflections
- Ideal Green Screen for photo and video
- Versatile and flexible
- Affordable price

Product Code	Sizes	Format	Description	Viewing Size (mm)	Product Height (mm)	Height from floor to bottom bar (mm)	Product Width (mm)
TW-AV-50	50' - 50'	AV (1:1)	Tripod + Wall 50' x 50'	1270 - 1270	2160	785	1320
TW-AV-60	60' - 60'	AV (1:1)	Tripod + Wall 60' x 60'	1530 - 1530	2160	525	1580
TW-AV-70	70' - 70'	AV (1:1)	Tripod + Wall 70' x 70'	1780 - 1780	2460	575	1830
TW-NTSC-84D	67' - 50'	NTSC (4:3)	Tripod + Wall 50' x 67'	1710 - 1270	2160	785	1760
TW-NTSC-100D	80' - 60'	NTSC (4:3)	Tripod + Wall 80' x 60'	1530 - 2030	2160	525	2080
TW-HD-72D	63' - 35'	HD (16:9)	Tripod + Wall 63' x 35'	1590 - 900	1960	955	1640
TW-HD-82D	74' - 41'	HD (16:9)	Tripod + Wall 74' x 41'	1870 - 1050	1960	805	1920
TW-HD-92D	80' - 45'	HD (16:9)	Tripod + Wall 80' x 45'	1140 - 2030	1960	715	2080
TW-PC-85D	72' - 45'	PC (16:10)	Tripod + Wall 72' x 45'	1830 - 1140	1960	715	1880
TW-PC-94D	80' - 50'	PC (16:10)	Tripod + Wall 80' x 50'	1270 - 2030	2160	785	2080

PM SERIES PROJECTOR BRACKETS

PM - 01

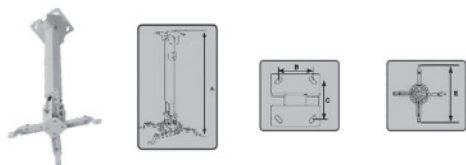

Feature & Specification:

- Material: Aluminium and magnesium alloys
- Color: White
- Selects the high quality cold rolled steel sheet, Aviation aluminium solid and reliable
- Super compatible with various adjustable angle, it is suitable to most of projector
- Wires through pipe, beauty and generous
- Pickling phosphating on the surface, electrostatic powder coating processing
- Plastic lining for inside and outside pipe to avoid damage

Model	Size (mm)				Max Loading (kg)
	A	B	C	E	
PM01-650	430-650				8
PM01-1200	600-1200	75	90	90-360	
PM01-1500	900-1800				

PM - 06




Feature & Specification:

- Material: Cold roled silver
- Color: Silver
- Back leaning angle: +30°
- Turning: 360°
- Install way: Ceiling suspended

Model	Size (mm)	Packing Size (mm)	Weight (kg)	
			N.W	Bear Load
PM06	507-747	700 x 250 x 200	2	10

PM - 02

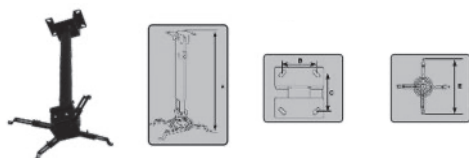

Feature & Specification:

- Material: Steel
- Color: Black
- Selects the high quality cold rolled steel sheet, Aviation aluminium solid and reliable
- Super compatible with various adjustable angle, it is suitable to most of projector
- Wires through pipe, beauty and generous
- Pickling phosphating on the surface, electrostatic powder coating processing
- Plastic lining for inside and outside pipe to avoid damage

Model	Size (mm)				Max Loading (kg)
	A	B	C	E	
PM02-1000	500-100				8
PM02-2000	1000-2000	75	90	90-360	

PM - 07




Feature & Specification:

- Material: Cold roled silver
- Color: Silver
- Back leaning angle: +15°
- Turning: 360°
- Install way: Ceiling suspended

Model	Size (mm)	Packing Size (mm)	Weight (kg)	
			N.W	Bear Load
PM07-100	140	560 x 203 x 285	2	15
PM07-600	420-640	560 x 390 x 285	3	15

PM - 05

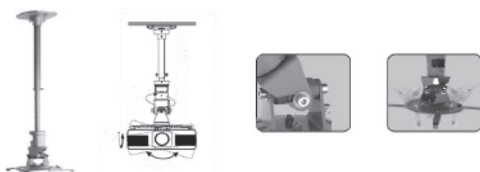

Feature & Specification:

- Material: Steel
- Color: Black
- Selects the high quality cold rolled steel sheet, aviation aluminium solid and reliable
- Super compatible with various adjustable angle, it is suitable to most of projector
- Wires through pipe, beauty and generous
- Pickling phosphating on the surface, electrostatic powder coating processing

Model	Shape	Size (mm)	Max Loading (kg)
PM-05	ceiling-type	10	8

PM - 08



Feature & Specification:

- Material: Aluminium alloy
- Color: Black
- Back leaning angle: +30°
- Turning: 360°
- Distance from wall: 240-310mm
- Install way: Ceiling suspended

Model	Size (mm)	Packing Size (mm)	Weight (kg)	
			N.W	Bear Load
PM08-100	135	560 x 230 x 285	4	10
PM08-300	240-310	780 x 230 x 285	7	10
PM08-700	470-710	1090 x 230 x 285	9	15

ST SERIES
SHORT THROW PROJECTOR BRACKETS

ST - 03



- Feature & Specification:
- Material: cold-rolled steel sheets
 - Color: White
 - Selects the high quality cold rolled steel sheet, solid and reliable
 - Super compatible with various adjustable angle, it is suitable to most the projector
 - Wires through pipe, beauty and generous
 - Pickling phosphating on the surface, electrostatic powder coating processing
 - Plastic lining for inside and outside pipe

Model	Size (mm)					Packing Size (mm)	Weight (kg)		
	A	B	C	D	E		Gross Weight	Net Weight	Max Loading
ST03-60	370-610	80	100	90-400	65	480 x 135 x 155	3.9	1.8	10
ST03-90	530-870					640 x 135 x 155	5.2	2.4	
ST03-120	690-1200					800 x 135 x 155	6.1	2.9	
ST03-150	1030-1500					1140 x 135 x 155	7.5	3.5	

ST - 07



- Feature & Specification:
- Material: Aluminium alloy
 - Color: Silver
 - Distance from wall: 685-1200mm
 - Back leaning angle: 180°
 - Turning: 360°
 - Install way: Wall mounted




Model	Size (mm)	Packing Size (mm)	Weight (kg)	
			N.W	Bear Load
ST07	375	560 x 395 x 285	3	15

ST - 08



- Feature & Specification:
- Material: Aluminium alloy
 - Color: Silver
 - Distance from wall: 410-632mm
 - Angle of inclination: +30°
 - Back leaning angle: 180°
 - Turning: 360°
 - Product weight: 7kg
 - Install way: Wall mounted

Model	Size (mm)	Packing Size (mm)	Weight (kg)	
			N.W	Bear Load
ST08-30	235-310	500 x 475 x 250	3	10
ST08-60	410-632	600 x 475 x 250	3	10

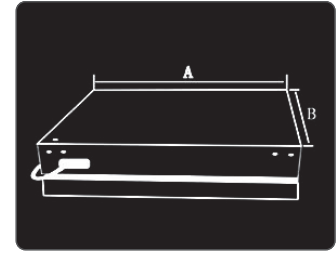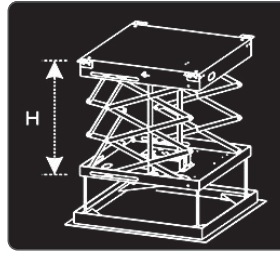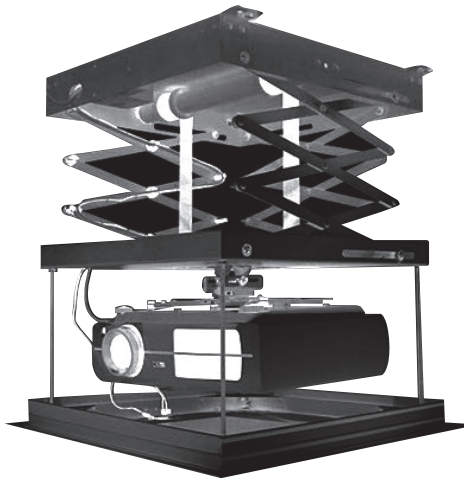


3 SIDED SCISSORS PROJECTOR LIFT

- Quick and easy installation.
- Equipped with RJ45 connector.
- Quiet and smooth motor.
- Support up to 60kg projectors.
- Maximum 6 meter height.

Model / Product Code	Max Height (mm)	Max Weight (Kg)	Face Plate Size (mm)	Gross Packing Dimension (mm)
WW-JD1000-25/PL03-4-1000	1000	25	500 x 500	580 x 510 x 265
WW-JD1000-60	1000	60	500 x 500	580 x 510 x 265
WW-JD1500-25/PL03-4-1500	1500	25	500 x 500	580 x 510 x 305
WW-JD1500-60	1500	60	500 x 500	580 x 510 x 305
WW-JD2000-25/PL03-4-2000	2000	25	500 x 500	580 x 510 x 345
WW-JD2000-60	2000	60	500 x 500	580 x 510 x 345
WW-JD2500-60	2500	60	500 x 500	580 x 510 x 375
WW-JD3000-60	3000	60	500 x 500	580 x 510 x 415
WW-JD4000-60	4000	60	500 x 500	580 x 510 x 475
WW-JD5000-60	5000	60	500 x 500	580 x 510 x 555
WW-JD6000-60	6000	60	500 x 500	580 x 510 x 615

UNIVERSAL SCREEN BRACKET

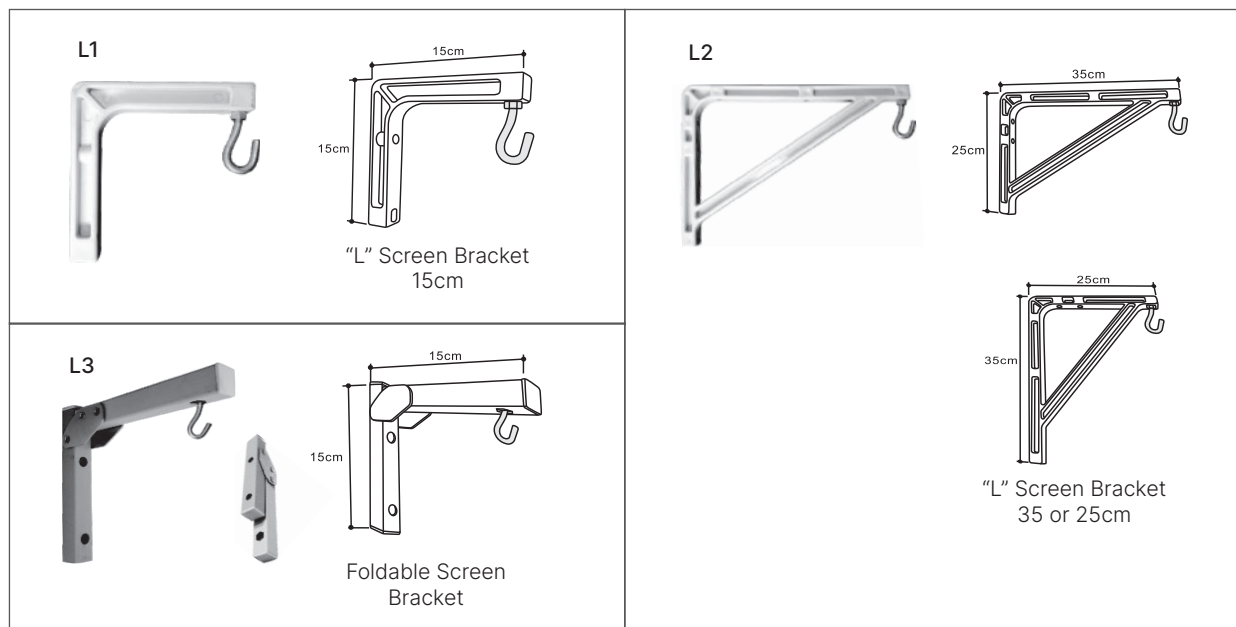

LPT-01



- Platform is height adjustable
- Powder coated tube, its surface is processed by pickling, phosphating and static spraying
- 18mm fireproof board
- 4 Castor wheels, two of which have brakes

Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-01	900*420*360	1pcs/carton	51*44*13	8

LPT-02



- Two different platforms, provide more space for projector or notebook etc.
- Powder coated tube, its surface is processed by pickling, phosphating and static spraying
- 18mm fireproof board
- 4 Castor wheels, two of which have brakes

Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-02	780*520*480	1pcs/carton	70*48*9	12

LPT-03



- Table height adjusts instantly from 80-120cm
- Laptop shelf adjusts to convenient position required
- Unit folds up to be used as a dolly-trolley for ease to transport projection
- Comes with air cylinder lift system
- 2 Castor wheels, easy to move

Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-03	(880-1240)*500*400	1pcs/carton	92*43*13	12.5


LPT-04



- Platform is height adjustable
- Powder coated tube, its surface is processed by pickling, phosphating and static spraying
- 18mm fireproof board
- 4 Castor wheels, easy to move

Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-04	1250*500*400	1pcs/carton	65*54*15	11


LPT-05

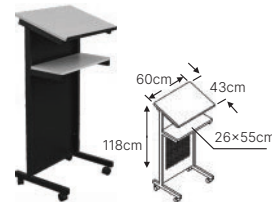

- Two platform design, top board with anti-drop protector
- Powder coated tube, its surface is processed by pickling, phosphating and static spraying
- 18mm fireproof board
- 4 Castor wheels, two of which have brakes

Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-05	1200*600*450	1pcs/carton	120*61*10	18

LPT-06

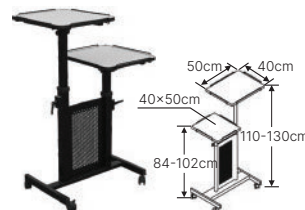

- Two platform design, top board with anti-drop protector
- Powder coated tube, its surface is processed by pickling, phosphating and static spraying
- 4 Castor wheels, two of which have brakes

Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-06	1180*650*460	1pcs/carton	105*56*15	16.5

LPT-07



- Suits most projectors
- Powder coated tube, its surface is processed by pickling, phosphating and static spraying
- 18mm fireproof board
- "X" structure, stronger and anti-swing

Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-07	1100*600*450	1pcs/carton	132*55*13	9

LPT-08



- Aluminum material & Industrial plastic
- 12mm cold rolled steel
- Easy to install & carry
- Max loading weight 10kg
- Height can be adjusted from 900-1200mm


Model	Product Size (mm)	Packing	Packing Size (mm)	Gross Weight (kg)
LPT-08	390*290*15	1pcs/carton	530*210*350	3



PROJECTOR SECURITY BOX

MEKI Projector Security Box is a projector ceiling mount to safeguard the projector at a public or outdoor area. Height adjustment ranges from 630mm to 990mm.

- Easy-installation
- Built-in Cooling Fan (Optional)
- Anti-theft
- Hinged door for easy access
- Open design for better ventilation
- Additional security available with optional pad locks
- Withstand projector weight up to maximum 15kg

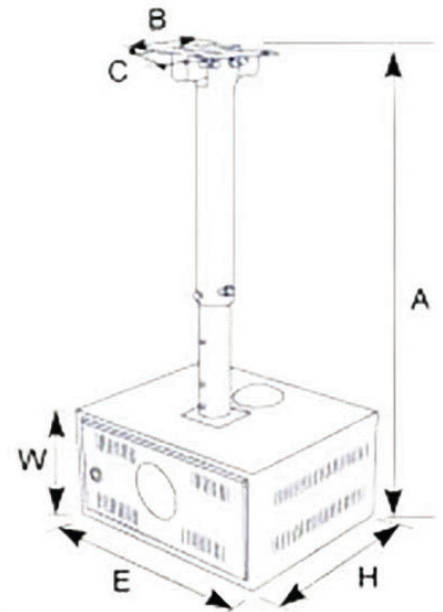


Model	Material	Size (mm)						Packaging Specification (mm)	Weight (kg)			Cooling Fan
		A	B	C	E	H	W		Gross	Net	Load	
SB-4527W	Cold rolled steel sheet	630 - 990	100	75	430	350	210	460 x 390 x 235	5.0	5.5	15	No
SBF-4537W	Cold rolled steel sheet	630 - 990	100	75	450	370	220	460 x 390 x 235	6.2	7.6	15	Yes
SB-5745W	Cold rolled steel sheet	630 - 990	100	75	575	450	280	585 x 470 x 275	6.2	7.6	15	No




MONITOR LIGHT BAR

- Monitor screen light bar for study, reading, and gaming
- Space saving: Slim and minimalistic design, unlike table lamps
- Eye-care lighting: No glare or reflected light on the screen. Helps to prevent eye fatigue for long hours of computer usage.
- Easily adjustable brightness levels
- 3 colour temperatures:
 - White (6500K): clear lighting for efficient office work
 - Warm (2900K): soft light for comfortable viewing
 - Natural (4500K): neutral colour temperature for easy reading
- Easy to install: Just hook on top of the monitor and power through any USB port




4 control pads with
dimmer and CCT control




500g Light Weight

SUITABLE FOR VARIOUS MONITOR

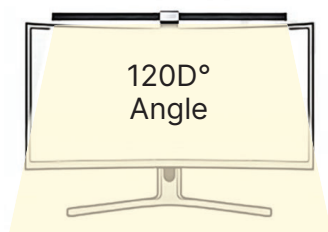

3 TEMPERATURE-COLOUR LIGHTS

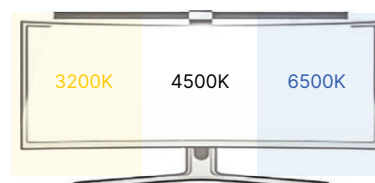

Power Input	Product Size (mm)	Voltage		
		Warm White	Natural White	White
DC5V	400 (L)*24 (W)*20 (H)	5W	6W	5W



NOTEBOOK LIGHT BAR


- 3 color temperatures & adjustable brightness (warm, natural, white)
- No screen glare and flicker. The notebook light bar adopts an asymmetric optical design to effectively eliminate the glare reflected from the screen. It will only illuminate the area near your screen and does not shine on the screen. The light bar can improve reading concentration and comfort, relieve eye fatigue, and protect your eye-sight.
- USB power supply. The light bar is powered by USB, whether it is a laptop, mobile phone charger, or portable charger.
- Space saving & easy to install. The unique structure design allows the light bar to be placed stably on the top of the display, saving a lot of desk space. No screw or tape is required to mount the light bar. A mounting clip is provided with silicone pad to prevent the product from sliding or scratching the laptop during use. It is your work, study, and entertainment assistant.

The Dimmer

Brightness+
Brightness-
Change Light Color
On/Off




FLEXIBLE GRAVITY BASED CLIP

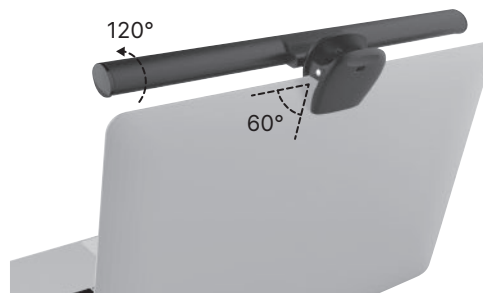

Angle Adjustment



3 TEMPERATURE-COLOUR LIGHTS

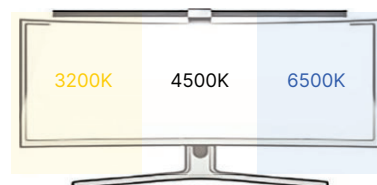

5 WAY TO POWER UP



USB Socket



Laptop



Adapter



Power Bank



Computer

Product Voltage	Power Supply	Lighting Tone (3 tones adjustable)	Lamp Length	Cable Length	Weight
3W	USB / Mobile phone charger 5V1A	Daylight White, Warm, Natural White	26cm	80cm	135g

ELECTRIC TABLE / DESKTOP CONVERTER

TM23-01



Description

- Height adjustable table
- Comes with built in height memory

Feature & Specification:

- Material: Steel table frame + motor + controller
- Thickness: 1.5-5mm
- Bearing: 120kg
- Height: 63cm-129cm
- Color: Black / White / Gray
- Handle LED digital display: White

Product	Packing Information
Dual Motors & 3 Stage Standard Columns	Qty/Ctn: 1pc
	Carton Size: 1035 x 345 x 195mm
	G.W.: 31kg

SM22-01D



Description

- Height adjustable table
- Comes with built in height memory

Feature & Specification:

- Material: Steel table frame + motor + controller
- Thickness: 1.5-5mm
- Bearing: 80kg
- Height: 72cm-122cm
- Color: Black / White / Gray
- Handle LED digital display: White

Product	Packing Information
Single motor two lifting tables	Qty/Ctn: 1pc
	Carton Size: 1100 x 280 x 160mm
	G.W.: 21.65kg

DC02



Description

- Large work surface of particle board or MDF board
- Built in slot for tablet & phones
- Squeeze handle makes rising monitors almost effortless
- Silicone pads protect table and desk surface
- It can be used in office, studio, cubicle, home, etc

Feature & Specification:

- Material: Plastic, Particle board, Steel
- Tabletop Thickness: 0.47"
- Bearing: 80kg
- Height Range: 5.5" - 15.75"
- Color: Black
- Worksurface Weight Capacity: 28.6lbs / 33lbs
- Keyboard Weight Capacity: 4.4lbs
- Worksurface Size: 31.5" x 15.75" / 37.4" x 15.75"

Product	Packing Information
Desktop Converter	Qty/Ctn: 1pc
	Carton Size: 876 x 533 x 145mm
	G.W.: 15.52kg

HDMI CABLES

Gold Plated HDMI Cable

Specifications:

- Bandwidth up to 18gbps
- 4k@50/60(2160p), which is 4 times the clarity of 1080p/60 video resolution
- Up to 32 audio shannels for a multi-dimensional immersive audio experience
- Up to 1536khz audio sample frequency for the highest audio fidelity
- Simultaneous delivery of dual video streams to multiple users on the same screen
- CEC extensions provide expanded command and control of electronics devices through a single control point
- Simultaneous delivery of multi-stream audio to multiple users(up to 4)
- Support for the wide angle theatrical 21:9 video aspect ratio
- Dynamic synchronization of video and audio streams

18
Gbps

1536
kHz

Ultra
Speed
For **4K**

CEC
Extensions

32
Channel
Audio



Model	Length	AWG	OD (mm)	Ultra HD	Audio
GH-Z-2	2.0m	30	7.3	4k x 2k @ 50/60Hz	32 Channel
GH-Z-3	3.0m	30	8.6		
GH-Z-5	5.0m	30	8.6		
GH-Z-10	10.0m	26	8.6		
GH-Z-12	12.0m	26	9.3		
GH-Z-15	15.0m	24	9.3		

Colourful Flat HDMI 2.0 Cable

Specifications:

- High speed HDMI cable with Ethernet
- Up to 4k resolution
- EMI shielding
- 24k carat gold plated connectors
- High quality aluminium shell
- Protective nylon cable covering the whole cable
- Bandwidth: 18gbps
- HDMI certified
- Flat belt cable for better cable management
- Five different colours available

Model	Length	AWG	OD (mm)	Ultra HD	Audio
GH-T-2	2.0m	30	7.3	4k x 2k @ 50/60Hz	32 Channel
GH-T-3	3.0m				
GH-T-5	5.0m				



HDMI CABLES



Fibre Optic HDMI 2.0 Cable

Specifications:

- 4K x 2K Support
- No signal loss
- Support resolution up to 4K at 60Hz
- Full 3D support
- TV oversampling refresh rates
- 18.0 Gbps speed
- 32 Uncompressed audio channel
- ARC (Audio Return Channel)
- Storage temperature from -20 celcius until 80 celcius
- Power consumption : 250 mW
- Port-powered: No external power needed
- Cable diameter: 4.8mm
- Bending radius: more than 20mm

PHONE CABLES



Sync & Charge Type-C Cable

Specifications:


- Compatible with all C type USB interface smart phone and tablets
- Support power charging up to 3A and data transfer up to 480Mb/s
- Durable, hard wearing nylon braided cable provides extra protection
- Length of the Cable : 1.0m



Sync & Charge Micro USB Cable

Specifications:

- Compatible with all micro-USB interface smart phones and tablets
- Support both power charging and data transfer
- Durable cable with PVC material
- Length of the Cable : 1.0m

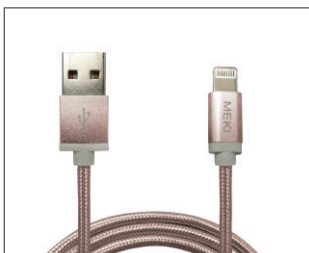


Sync & Charge Lightning Cable

Specifications:

- Compatible with iPhone, iPad, iPod with lightning connector
- Support up to 24A current with faster power charging
- Durable, hard wearing nylon braided cable provides extra protection
- Length of the Cable : 1.0m

TV BRACKETS

VM-SL21M

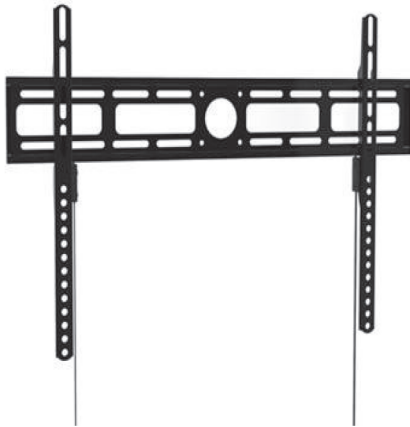

Description


- Lock / Unlock system
- Ultra-slim design series
- Universal hardware pack included
- Available with a powder coat silver or black finish

Feature & Specification:

- Material: High gauge cold rolled steel
- Screen Size: 32" - 70"
- Max.load: 45kg
- Max.VESA: 600 x 400
- Distance to the wall: 22mm

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 10pc
	Carton Size: 670 x 235 x 203mm
	G.W.: 14.8kg

VM-SL21S

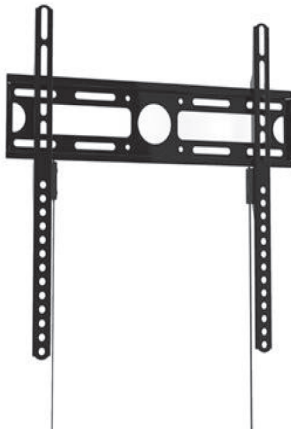

Description


- Lock / Unlock system
- Ultra-slim design series
- Universal hardware pack included
- Available with a powder coat silver or black finish

Feature & Specification:

- Material: High gauge cold rolled steel
- Screen Size: 23" - 55"
- Max.load: 35kg
- Max.VESA: 400 x 400
- Distance to the wall: 22mm

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 10pcs
	Carton Size: 550 x 235 x 203mm
	G.W.: 12.4kg

VM-SL22M

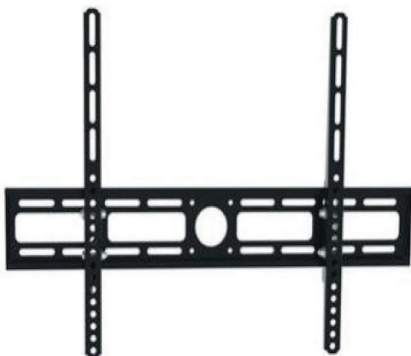

Description

- Angle Free Tilt
- Lockable Arms
- Ultra-slim design series
- Universal hardware pack included
- Available with a powder coat silver or black finish

Feature & Specification:

- Material: High gauge cold rolled steel
- Screen Size: 32" - 70"
- Max.load: 45kg
- Tilt: $\pm 10^\circ$
- Max.VESA: 600 x 400
- Distance to the wall: 34mm

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 10pcs
	Carton Size: 650 x 235 x 195mm
	G.W.: 17.6kg

TV BRACKETS

VM-SL22S



- Description
- Angle Free Tilt
 - Lockable Arms
 - Ultra-slim design series
 - Universal hardware pack included
 - Available with a powder coat silver or black finish

- Feature & Specification:
- Material: High gauge cold rolled steel
 - Screen Size: 23" - 55"
 - Max.load: 35kg
 - Tilt: ±10°
 - Max.VESA: 400 x 400
 - Distance to the wall: 34mm

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 10pcs
	Carton Size: 460 x 235 x 220mm
	G.W.: 14.6kg

VM-LT16



- Description
- Safety lock, Bubble level
 - Angle Free Tilt
 - Ultra-Slim Design
 - Universal hardware pack included
 - Available with a powder coat silver or black finish

- Feature & Specification:
- Material: High gauge cold rolled steel
 - Screen Size: 42" - 80"
 - Max.load: 60kg
 - Tilt: ±10°
 - Max.VESA: 800 x 500
 - Distance to the wall: 43mm

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 4pcs
	Carton Size: 875 x 225 x 245mm
	G.W.: 14.2kg

VM-LT09M



- Description
- Angle Free Tilt, ±2° adjust horizontally
 - Cable routing management system
 - Universal hardware pack included
 - Available with a powder coat silver or black finish

- Feature & Specification:
- Material: High gauge cold rolled steel
 - Screen Size: 32" - 70"
 - Max.load: 35kg
 - Tilt: ±15°
 - Swivel: 180°
 - Pivot for leveling: ±2°
 - Max.VESA: 600 x 400
 - Distance to the wall: 43 - 502mm

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 5pcs
	Carton Size: 660 x 315 x 250mm
	G.W.: 27.5kg

TV BRACKETS

LX21G-22F



Description

- Easy to use and install, LX21G-22F is designed to fit any 23"-42" Flat Panel TV up to 30kg.
- This fixed-position mount is perfect for viewing your TV at eye level.
- Integrated bubble level assures easy installation alignment.
- Compatible with VESA hole up to 200x200.

Feature & Specification:

- Material: Steel
- Screen Size: 23" - 42"
- Max.load: 30kg
- Max.VESA: 215 x 205

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 1pc
	Carton Size: 250 x 230 x 30mm
	G.W.: 1.9kg

LX21G-44T



Description

- Easy to use and install, LX21G-44T is designed to fit any 32"-55" Flat Panel TV up to 40kg.
- This tilting mount gives you the best view from the floor or couch.
- Fingertip tilt allows for easy TV adjustments, and mount tilts TV back for easy cable access.
- Integrated bubble level assures easy installation alignment.
- Compatible with VESA hole up to 400x400.

Feature & Specification:

- Material: Steel
- Screen Size: 32" - 55"
- Max.load: 40kg
- Tilt: $\pm 15^\circ$
- Max.VESA: 405 x 405

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 1pc
	Carton Size: 440 x 430 x 60mm
	G.W.: 3.1kg

LX42-69T



Description

- The large heavy-duty tilt wall mount can accommodate most 60"-100" LED, LCD Flat Panel TVs with a maximum weight of 75kgs.
- Tilts up to 5° and down 10° for the perfect viewing angle.
- The applicable screen size is almost twice as large as that classic ones.
- Slim design sits just 85mm from wall to complement the sleek look of ultra-thin TVs.
- Its automatically click-in spring lock with easily-release cord easily and securely attaches your flat panels to wall.
- Compatible with VESA hole up to 605x924. In addition, it's suitable for curved TV. Simple construction enables easy installation.

Feature & Specification:

- Material: Steel
- Screen Size: 60" - 100"
- Max.load: 75kg
- Tilt: $\pm 15^\circ$
- Max.VESA: 605 x 924

Product	Packing Information
Fixed TV Mount	Qty/Ctn: 1pc
	Carton Size: 960 x 630 x 90mm
	G.W.: 4.2kg

SCREEN FABRICS

Parameter Specification


Model	Description	Gain	View Angle	Thickness	Tensioned/Non-Tensioned	Front/Rear Projection	Cleanable
VS-P8001	White Film	1.0	110°	0.38±0.02(mm)	Tensioned	Front	Yes
VS-P8002	Grey Film	1.0	90°	0.42±0.02(mm)	Tensioned	Front	Yes
VS-P8003	White Black Film	1.1	100°	0.45±0.02(mm)	Tensioned	Front	Yes
VS-P8004	Rear Screen Film	1.8	60°	0.55±0.02(mm)	Tensioned	Rear	Yes
VS-P8005	Wrap Knitting Film	1.1	100°	0.45±0.02(mm)	Non-Tensioned	Front	Yes
VS-P8006	Matte White Fabric	1.1	100°	0.50±0.02(mm)	Non-Tensioned	Front	Yes
VS-P8007	Glass Beaded Fabric	2.1	100°	0.47±0.02(mm)	Non-Tensioned	Front	No
VS-P8008	Fiber Glass Fabric	1.1	100°	0.32±0.02(mm)	Non-Tensioned	Front	Yes
VS-P8009	Non-Woven Fabric	1.1	100°	0.32±0.02(mm)	Non-Tensioned	Front	Yes
VS-P8010	Flexibility Film	1.1	100°	0.32±0.02(mm)	Tensioned	Front	Yes
VS-P8011	Grey Screen Fabric	1.0	90°	0.35±0.02(mm)	Non-Tensioned	Front	Yes
VS-P8012	Double Side Embossing Fabric	1.1	100°	0.35±0.02(mm)	Non-Tensioned	Front	Yes
VS-P8013	White Black Film with Hole	1.0	110°	0.35±0.02(mm)	Tensioned	Front	Yes
VS-P8014	3D Virtual Grey Film	1.85	22°	0.35±0.02(mm)	Tensioned	Front	Yes
VS-P8015	PVC Smoke Translucent	2.3	70°	0.32±0.02(mm)	Tensioned	Rear	Yes
VS-P8016	PVC White Translucent	2.3	70°	0.32±0.02(mm)	Tensioned	Rear	Yes
VS-P8017	PVC Black Translucent	2.3	70°	0.32±0.02(mm)	Tensioned	Rear	Yes
VS-P8018	3D Silver Film	3.5	160°	0.35±0.02(mm)	Tensioned	Front	Yes

*We able to customize all above ratios for any types of screen


Screen Ratio:




1:1 for smaller project sizes and higher rooms mainly




4:3 for video and PC image mainly, for demonstration and teaching

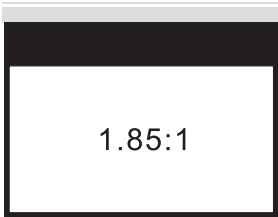

1:85:1 for television signal image of wide screen mainly

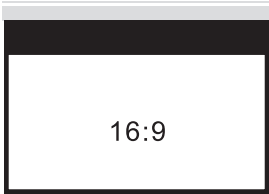

16:9 for High-definition television image mainly, for home theatre

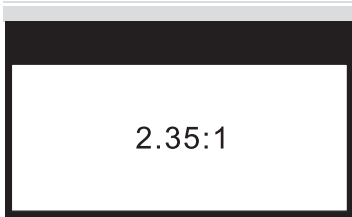

2:35:1 for stereo image of wide screen mainly



www.meki-int.com